

Roll 370 CATERING

01002012-xxx OLI-1



*Photo for illustrative purposes

External dimensions (L x l x h)

600 x 800 x 1670 mm

Internal dimensions* (L x l x h)

435 x 620 x 1350 mm

Internal volume

364 L

Empty weight

100 Kg

Cold source - advices

Eutectic plate : 1 eutectic plate TOP370 all temperature according to the existing Olivo standard.



Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane foam** ;
- **Monobloc EPDM frame seal** ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 1 locking point, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated box-door hinge** ;
- **2 side-handling handles** rotationally molded into the mass.
- **1 stainless steel catering rack**, 17 levels, U-shaped slides.

Logistical specifications : Half-Euro pallet 600 x 800 mm / Gastronorm – Euronorm mm

Chassis :

- **Embedded support frame** with yellow zinc coating and ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;

Feet : set of 4 metal feet, diameter 60 mm ;

Shelf : 1 intermediate grid, steel with polyamide or stainless steel coating, with or without anti-fall edges. Provided with 2 fixing legs ;

Central and ergonomic braking : Zinc-plated/bichromated pedal ; Thermometer location in the crate

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Logo molded into the mass.

Branding marking : engraved aluminum plate 150 x 90 mm

* **Average value for reference purposes**



Chilled



Frozen



Ambient




HDPE



ATP



Fork and Knife

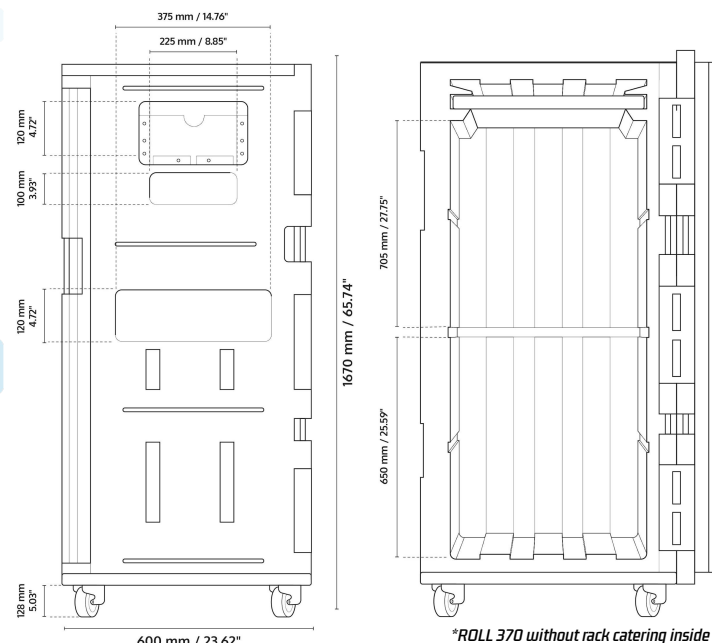

*ROLL 370 without rack catering inside

Insulated container properties

Thermal

Coef K.	0.39 W/m.2°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 80 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	480 Kg
Static load capacity	960 Kg
Double-walled, rotational-molded and grooved	

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu

■ Update 26/10/2023

1 bld des Mineurs 42230 Roche-la-Molière - www.olivo.eu