

Roll 780

01002015-xxx OLI-1



**Photo for illustrative purposes*

External dimensions [L x l x h]

800 x 1000 x 1900 mm

Internal dimensions* [L x l x h]

610 x 820 x 1535 mm

Internal volume

768 L

Empty weight

130 Kg

Cold source - advices

Eutectic plate : up to 4 eutectic plates TOP780 all temperature according to the existing Olivo standard.

Dry ice drawer : capacity of 30L, made of aluminium.

SIBER bac : rotomoulded dry ice injection container, mixed chilled and frozen.

Insulated container standard specifications

Caisse & porte :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated** box-door hinge ;
- **2 side-handling handles** rotationally molded into the mass ;

Logistical specifications : Euronorm crate 600 x 400 mm

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 125 mm and height 155 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see User Guide) ;

Feet : set of 4 metal feet, diameter 80 mm ;

Intermediate grid : up to 3 steel grids with polyamide coating or stainless steel
Thermometer location in the crate ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Logo molded into the mass.

Branding marking : engraved aluminum plate 150 x 90 mm' ;

** Average value for reference purposes*



Chilled



Frozen



Ambient



Thermal

Insulated container properties


Coef K.	0.33 W/m2.°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 90 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	600 Kg
Static load capacity	1200 Kg
Double-walled, rotational-molded and grooved	

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu ■ **Update 26/10/2023**

1 bld des Mineurs 42230 Roche-la-Molière - www.olivo.eu

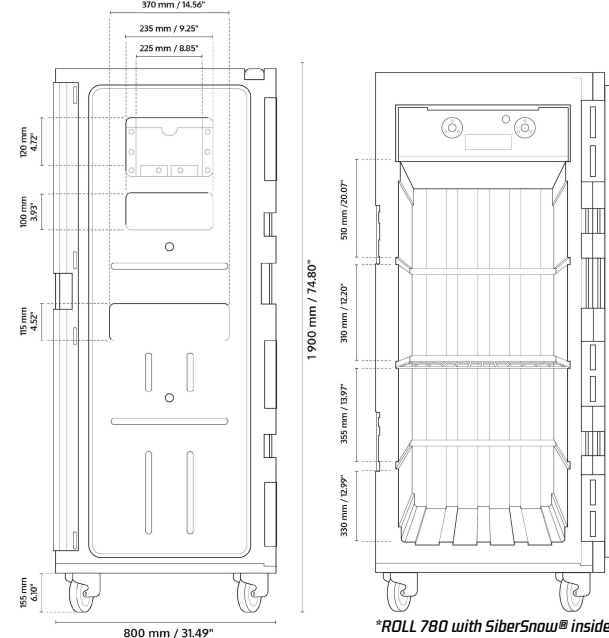

**ROLL 780 with SiberSnow® inside*