

# Roll 220 CATERING

01002009-xxx OLI-1



Photo for illustrative purposes

## External dimensions (L x l x h)

600 x 800 x 1130 mm

## Internal dimensions\* (L x l x h)

430 x 610 x 820 mm

## Internal volume

215 L

## Empty weight

90 Kg

## Cold source - advices

**Eutectic plate** : up to 2 eutectic plates TOP370 all temperature according to the existing Olivo standard.

## Insulated container standard specifications

### Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane foam** ;
- **Monobloc EPDM frame seal** ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 1 locking point, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated box-door hinge** ;
- **2 side-handling handles** rotationally molded into the mass ;
- **1 stainless steel catering rack**, 9 levels, U-shaped slides.

Logistical specifications : Half-Euro pallet 800 x 600 mm / Gastronorm - Euronorm mm

### Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich polyamide noise-reducing wheels** attach to a plate, diameter 100 mm and height 128 mm.

## Accessory options

- Brakes** : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;
- Feet** : set of 4 metal feet, diameter 60 mm ;
- Catering configuration** : Euronorme 400x600 mm or Gastronorme 325 x 530 mm' ;

## Customization

- Signage** : heat-sealed adhesive – ready-to-print file provided by the client.
- Tracking** : temperature/GPS tracking solution.
- Branding marking** : engraved aluminum plate 150 x 90 mm

\* Average value for reference purposes




Chilled



Frozen



Ambient

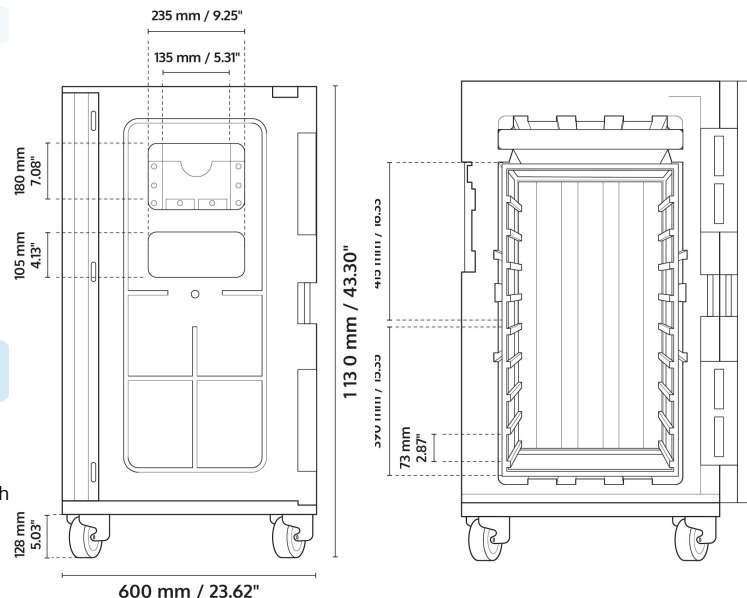

## Insulated container properties

Thermal	Coef K.	0.38 W/m <sup>2</sup> .°C
	ATP category	IR
	Temperature resistance	-80°C/+70°C
	Double wall thickness	≈ 85 mm
Mechanical	Internal convection grooves	
	Dynamic load capacity	480 Kg
	Static load capacity	960 Kg
Double-walled, rotational-molded and grooved		

For advice on best practices for use and thermal performance, contact the Olivo team / [contact@olivo.eu](mailto:contact@olivo.eu)

Update 26/10/2023