

# Roll 370 CATERING

01002012-xxx OLI-1



\*Photo for illustrative purposes

## External dimensions (L x l x h)

600 x 800 x 1670 mm

## Internal dimensions\* (L x l x h)

435 x 620 x 1350 mm

## Internal volume

364 L

## Empty weight

100 Kg

## Cold source - advices

**Eutectic plate :** 1 eutectic plate TOP370 all temperature according to the existing Olivo standard.



## Insulated container standard specifications

### Box & door :

- Monobloc wall in UV-resistant food-grade polyethylene ;
- Injected polyurethane foam ;
- Monobloc EPDM frame seal ;
- Sealed lateral Pelican® closure, yellow zinc coating, ergonomic handling sheath, 1 locking point, and 1 galvanized door stop ;
- 270° door opening ;
- Double-axis zinc-plated box-door hinge ;
- 2 side-handling handles rotationally molded into the mass.
- 1 stainless steel catering rack, 17 levels, U-shaped slides.

Logistical specifications : Half-Euro pallet 600 x 800 mm / Gastronorm – Euronorm mm

### Chassis :

- Embedded support frame with yellow zinc coating and ;
- 2 swivel wheels, 2 fixed sandwich polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm.

## Accessory options

**Brakes :** set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;

**Feet :** set of 4 metal feet, diameter 60 mm ;

**Shelf :** 1 intermediate grid, steel with polyamide or stainless steel coating, with or without anti-fall edges. Provided with 2 fixing legs ;

**Central and ergonomic braking :** Zinc-plated/bichromated pedal ; Thermometer location in the crate

## Customization


**Signage :** heat-sealed adhesive – ready-to-print file provided by the client.

**Tracking :** temperature/GPS tracking solution.

Logo molded into the mass.

**Branding marking :** engraved aluminum plate 150 x 90 mm

\* Average value for reference purposes

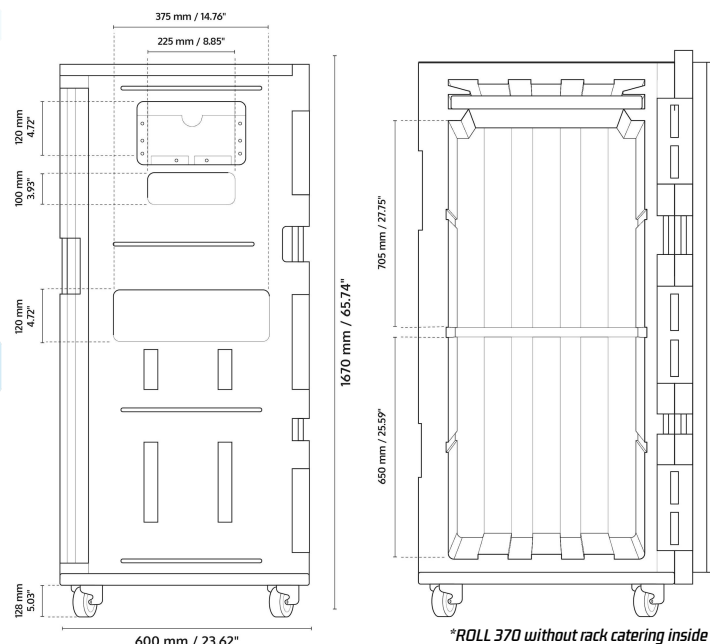

\*ROLL 370 without rack catering inside

## Insulated container properties

Thermal	Coef K.	0.39 W/m <sup>2</sup> .°C
	ATP category	IR
	Temperature resistance	-80°C/+70°C
	Double wall thickness	≈ 80 mm
	Internal convection grooves	
Mechanical	Dynamic load capacity	480 Kg
	Static load capacity	960 Kg
	Double-walled, rotational-molded and grooved	

For advice on best practices for use and thermal performance, contact the Olivo team / [contact@olivo.eu](mailto:contact@olivo.eu)

■ Update 26/10/2023

1 bld des Mineurs 42230 Roche-la-Molière - [www.olivo.eu](http://www.olivo.eu)