

Roll O' CITY

01001600-xxx OLI-1



*Photo for illustrative purposes

External dimensions (L x l x h)

800 x 1200 x 1270 mm

Internal dimensions (L x l x h)

610 x 940 x 900 mm

Internal volume

516 L

Empty weight

74 Kg

Cold source - advices

Eutectic plates : up to 4 eutectic plates TOP900 all temperature according to the existing Olivo standard. With or without plate support, depending on the amount of cold needed.



Insulated container standard specifications

Box & door :

- Monobloc wall in UV-resistant expanded food-grade polypropylene ;
- EPDM seal ;
- Sealed frontal closure, 3 locking points, door stop system with magnet ;
- 270° door opening ;
- 2 rear handling handles ;

Logistical specifications : Euro pallet 800 x 1 200 mm

Chassis :

- Embedded support frame anti-corrosion coated steel ;
- 2 swivel wheels, 2 fixed sandwich polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm ;

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;

Cargo bike : Bicylift compatibility kit mounted on chassis ;


Shelf : 1 intermediate grid, polyamide-coated steel or stainless steel.

Customization

Signage : Alu dibond 3 mm, 1000 x 800 mm - ready-to-print file provided by the client.

Tracking : Temperature/geolocation tracking solution ;

Branded marking : Engraved aluminum plate 150 x 90 mm ;

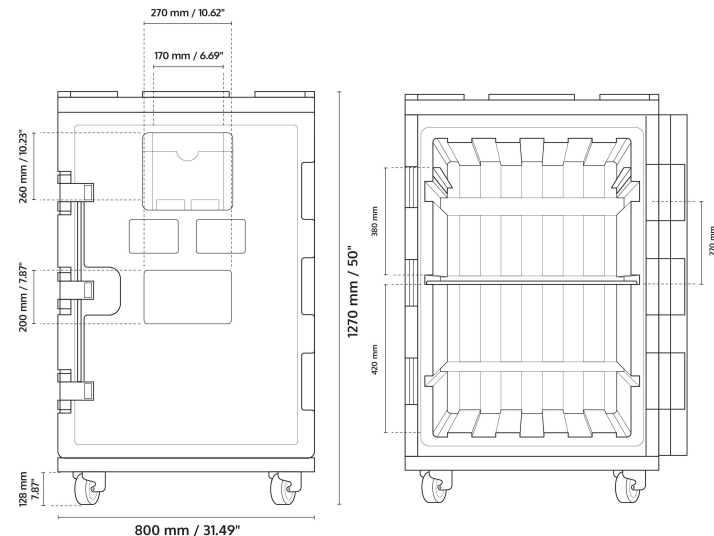

Insulated container properties

Thermal	Coef K.	0.34 W/m ² .°C
	ATP category	IR
	Temperature resistance	-80°C/+70°C
	Double wall thickness	≈ 95 mm
Mechanical	Dynamic load capacity	480 Kg
	Static load capacity	960 Kg

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu

■ Update 26/10/2023