

Roll 900

01002013-xxx OLI-1



**Photo for illustrative purposes*

External dimensions [L x l x h]

800 x 1200 x 1860 mm

Internal dimensions [L x l x h]

600 x 990 x 1490 mm

Internal volume

885 L

Empty weight

127 Kg

Cold source - advices

Eutectic plates : up to 4 eutectic plates TOP900 all temperature according to the existing Olivo standard.

Dry ice drawer : capacity of 35L, made of aluminium.

SIBER bac : rotomoulded dry ice injection container, mixed chilled and frozen.



Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated box-door hinge** ;
- **2 side-handling handles** rotationally molded into the mass ;
- **Stainless steel drain plug for water drainage** and special rotomolded bottom for water retention.

Logistical specifications : Euro pallet 800 x 1200 mm

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 125 mm and height 155 mm .

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see User Guide);

Feet : set of 4 metal feet, diameter 80 mm ;

Intermediate grid : up to 3 steel grids with polyamide coating or stainless steel ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Logo molded into the mass.

Branding marking : engraved aluminum plate 150 x 90 mm

** Average value for reference purposes*



Chilled



Frozen



Ambient



HDPE



ATP




Thermal

Mechanical

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu ■ Update 26/10/2023

1 bld des Mineurs 42230 Roche-la-Molière - www.olivo.eu

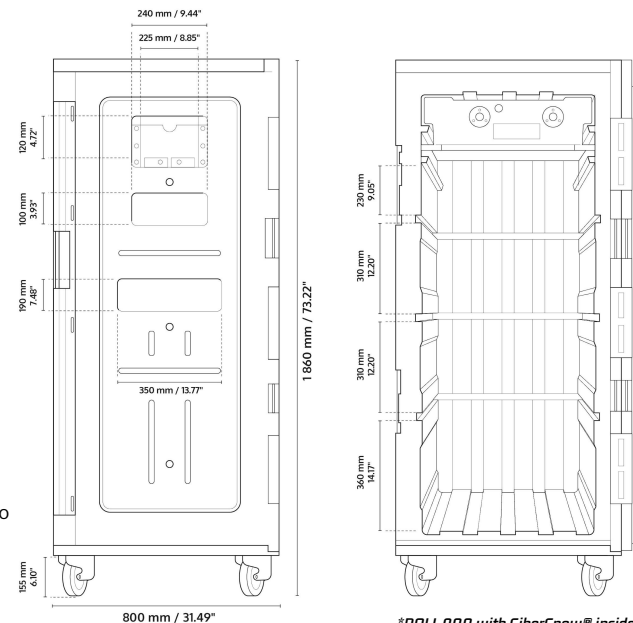

**ROLL 900 with SiberSnow® inside*

Insulated container properties

Coef K.	0.31 W/m ² .°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 90 mm
Internal convection grooves	

Dynamic load capacity	600 Kg
Static load capacity	1200 Kg

Double-walled, rotational-molded and grooved