

Roll 220 CATERING

01002009-xxx OLI-1



Photo for illustrative purposes

External dimensions (L x l x h)

600 x 800 x 1130 mm

Internal dimensions (L x l x h)

430 x 610 x 820 mm

Internal volume

215 L

Empty weight

90 Kg

Cold source - advices

Eutectic plate : up to 2 eutectic plates TOP370 all temperature according to the existing Olivo standard.

Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane foam** ;
- **Monobloc EPDM frame seal** ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 1 locking point, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated box-door hinge** ;
- **2 side-handling handles** rotationally molded into the mass ;
- **1 stainless steel catering rack**, 9 levels, U-shaped slides.

Logistical specifications : Half-Euro pallet 800 x 600 mm / Gastronorm - Euronorm mm

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attach to a plate, diameter 100 mm and height 128 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;

Feet : set of 4 metal feet, diameter 60 mm ;


Catering configuration : Euronorme 400x600 mm or Gastronorme 325 x 530 mm ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Branding marking : engraved aluminum plate 150 x 90 mm

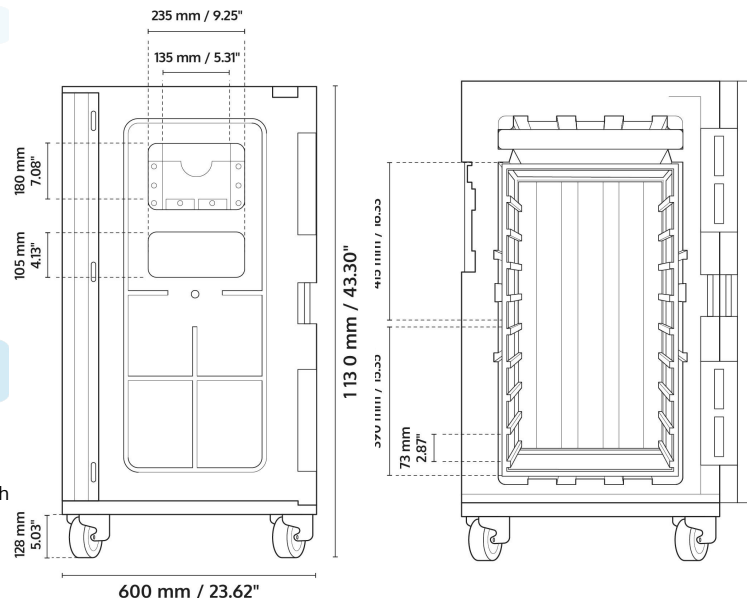

Insulated container properties

Thermal

| | |
|-----------------------------|---------------------------|
| Coef K. | 0.38 W/m ² .°C |
| ATP category | IR |
| Temperature resistance | -80°C/+70°C |
| Double wall thickness | ≈ 85 mm |
| Internal convection grooves | |

Mechanical

| | |
|-----------------------|--------|
| Dynamic load capacity | 480 Kg |
| Static load capacity | 960 Kg |

Double-walled, rotational-molded and grooved

Update 26/10/2023



Chilled



Frozen



Ambient



HDPE

