

# Roll 370

01002012-xxx OLI-1



\*Photo for illustrative purposes

## External dimensions (L x l x h)

600 x 800 x 1670 mm

## Internal dimensions (L x l x h)

435 x 620 x 1350 mm

## Internal volume

364 L

## Empty weight

83 Kg

## Cold source - advices

**Eutectic plate** : up to 2 eutectic plates TOP370 all temperature according to the existing Olivo standard.

**Dry ice drawer** : capacity of 14L, made of aluminium.

**SIBER bac** : rotomoulded dry ice injection container, mixed chilled and frozen.



## Insulated container standard specifications

### Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane foam** ;
- **Monobloc EPDM frame seal** ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated box-door hinge** ;
- **2 side-handling handles** rotationally molded into the mass.

Logistical specifications : Half-Euro pallet 600 x 800 mm

### Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm'.

## Accessory options

**Brakes** : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;

**Feet** : set of 4 metal feet, diameter 60 mm' ;

**Shelf** : 1 intermediate grid, steel with polyamide or stainless steel coating, with or without anti-fall edges. Provided with 2 fixing legs ;


**Central and ergonomic braking** : Zinc-plated/bichromated pedal ; Thermometer location in the crate

## Customization

**Signage** : heat-sealed adhesive – ready-to-print file provided by the client.

**Tracking** : temperature/GPS tracking solution.  
Logo molded into the mass.

**Branding marking** : engraved aluminum plate 150 x 90 mm

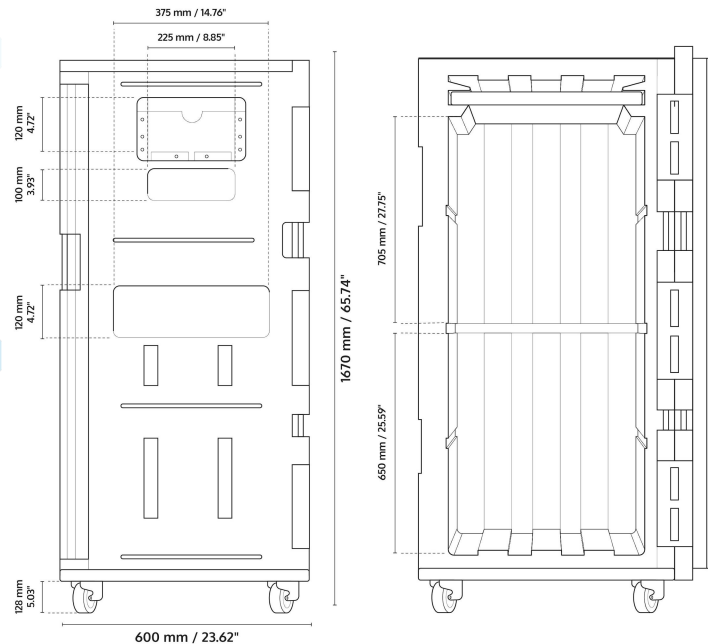

## Insulated container properties

Thermal  
Mechanical

Coef K. **0.37 W/m<sup>2</sup>.°C**  
ATP category **IR**  
Temperature resistance **-80°C/+70°C**  
Double wall thickness **≈ 80 mm**  
Internal convection grooves

Dynamic load capacity **480 Kg**  
Static load capacity **960 Kg**

Double-walled, rotational-molded and grooved

■ Update 26/10/2023