

Roll 650

01002023-xxx OLI-1



**Photo for illustrative purposes*

External dimensions (L x l x h)

29.13 x 37 x 72.44"

Internal dimensions (L x l x h)

22.24 x 29.92 x 59.05"

Internal volume

170.12 gal

Empty weight

220.46 lbs

Cold source - advices

Eutectic plate : up to 4 eutectic plates TOP900 all temperature according to the existing Olivo standard.

Tiroir à glace carbonique : capacité de 8.45 gal, en aluminium.

SIBER bac : rotomoulded dry ice injection container, mixed chilled and frozen.



Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated** box-door hinge ;
- **4 side-handling handles** rotationally molded into the mass ;

Logistical specifications : Cage roll

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 3.93" and height 5.03" .

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 3.93" (see User Guide) ;

Feet : set of 4 metal feet, diameter 2.36" ;

Intermediate grid : up to 3 steel grids with polyamide coating or stainless steel ;


Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Logo molded into the mass.

Branding marking : engraved aluminium plate 5.90 x 3.54 "

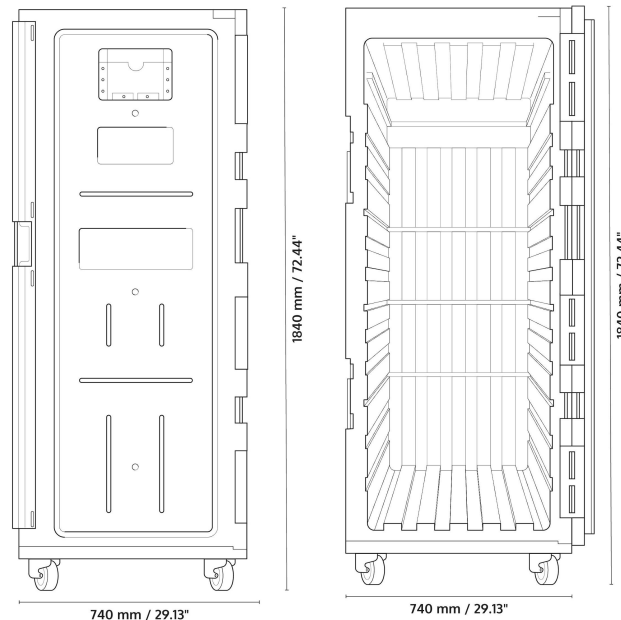

Insulated container properties

Thermal

Coef K.	0.38 W/m ² .°C
ATP category	IR
Temperature resistance	-112°F/+158°F
Double wall thickness	≈ 3.44"
Internal convection grooves	

Mecanical

Dynamic load capacity	1058.22 lbs
Static load capacity	2116.44 lbs

Double-walled, rotational-molded and grooved

■ Update 26/10/2023