

# Roll 670 SEA

01002017-xxx OLI-1



\*Photo for illustrative purposes

## External dimensions (L x l x h)

800 x 1030 x 1720 mm

## Internal dimensions (L x l x h)

610 x 865 x 1280 mm

## Internal volume

675 L

## Empty weight

130 Kg

## Cold source - advices

**Eutectic plate** : up to 1 eutectic plate TOP780 all temperature according to the existing Olivo standard.

## Insulated container standard specifications

### Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated** box-door hinge ;
- **2 side-handling handles** rotationally molded into the mass ;
- **Stainless steel drain plug for water drainage** and special rotomolded bottom for water retention ;
- **2 three-panel stainless steel grids**, liftable and foldable. Fixed on the rear wall ;
- Side label holder.

### Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm.

## Accessory options

**Brakes** : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;


**Feet** : set of 4 metal feet, diameter 60 mm ;

## Customization

**Signage** : heat-sealed adhesive – ready-to-print file provided by the client.

**Tracking** : temperature/GPS tracking solution.

**Branding marking** : engraved aluminum plate 150 x 90 mm ;

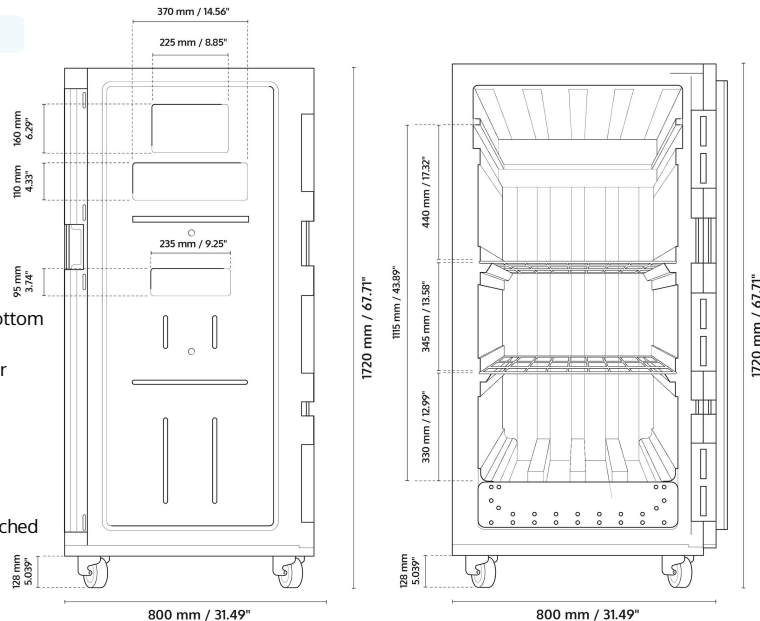

## Insulated container properties

|  |                             |                           |
|--|-----------------------------|---------------------------|
| Thermal                                      | Coef K.                     | 0.33 W/m <sup>2</sup> .°C |
|  | ATP category                | IR                        |
|  | Temperature resistance      | -80°C/+70°C               |
|  | Double wall thickness       | ≈ 95 mm                   |
| Mechanical                                   | Internal convection grooves |                           |
|  | Dynamic load capacity       | 480 Kg                    |
|  | Static load capacity        | 960 Kg                    |
| Double-walled, rotational-molded and grooved |                             |                           |

Update 26/10/2023



Chilled

Frozen

Ambient



HDPE



ATP

