

Roll 900 SEA

01002013-xxx OLI-1



*Photo for illustrative purposes

External dimensions (L x l x h)

800 x 1200 x 1860 mm

Internal dimensions* (L x l x h)

600 x 990 x 1390 mm

Internal volume

840 L

Empty weight

142 Kg

Cold source - advices

Eutectic plate : up to 4 eutectic plates TOP900 all temperature according to the existing Olivo standard.

Insulated container standard specifications

Box & door :

- Monobloc wall in UV-resistant food-grade polyethylene ;
- Injected polyurethane foam ;
- Monobloc EPDM frame seal ;
- Sealed lateral Pelican® closure, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- 270° door opening ;
- Double-axis zinc-plated box-door hinge ;
- 2 side-handling handles rotationally molded into the mass ;
- Stainless steel drain plug for water drainage and special rotomolded bottom for water retention.

Logistical specifications : Euro pallet 800 x 1200 mm

Chassis :

- Embedded support frame with yellow zinc coating ;
- 2 swivel wheels, 2 fixed sandwich polyamide noise-reducing wheels attached to plate, diameter 125 mm and height 155 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see User Guide);

Feet : set of 4 metal feet, diameter 80 mm ;

Intermediate grid : up to 3 steel grids with polyamide coating or stainless steel ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Logo molded into the mass.

Branding marking : engraved aluminum plate 150 x 90 mm

* Average value for reference purposes



Chilled



Frozen



Ambient



HDPE




Thermal

Insulated container properties

| | |
|-----------------------------|---------------------------|
| Coef K. | 0.31 W/m ² .°C |
| ATP category | IR |
| Temperature resistance | -80°C/+70°C |
| Double wall thickness | ≈ 90 mm |
| Internal convection grooves | |

Mechanical

| | |
|--|---------|
| Dynamic load capacity | 600 Kg |
| Static load capacity | 1200 Kg |
| Double-walled, rotational-molded and grooved | |

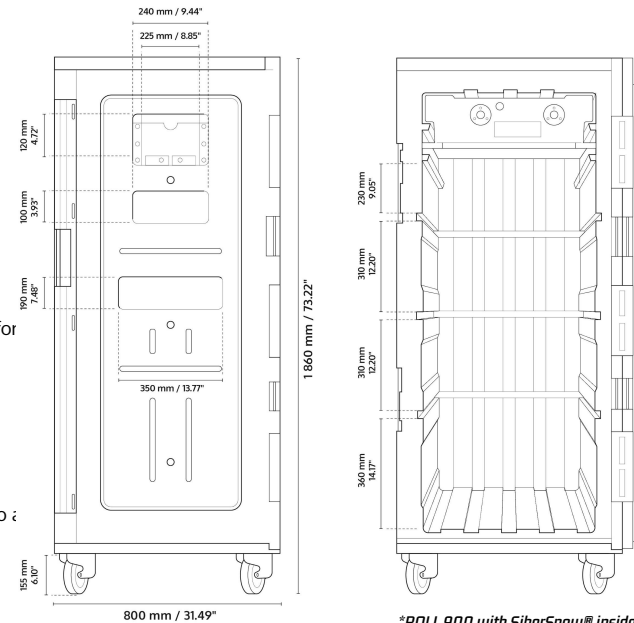

*ROLL 900 with SiberSnow® inside

■ Update 26/10/2023