

# Roll 220

01002009-xxx OLI-1



*\*Photo for illustrative purposes*

## External dimensions (L x l x h)

600 x 800 x 1130 mm

## Internal dimensions (L x l x h)

430 x 610 x 820 mm

## Internal volume

215 L

## Empty weight

84 Kg

## Cold source - advices

**Eutectic plate** : up to 2 eutectic plates TOP370 all temperature according to the existing Olivo standard.

**Dry ice drawer** : capacity of 14L, made of aluminium.

**SIBER bac** : dry ice injection container.



## Insulated container standard specifications

### Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 1 locking point, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated** box-door hinge ;
- **2 side-handling handles** rotationally molded into the mass.

Logistical specifications : Half-Euro pallet 800 x 600 / Euronorme crate 600 x 400

### Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm.

## Accessory options

**Brakes** : set of 2 polyamide sandwich wheels with brakes, diameter 3.93" (see User Guide) ;

**Feet** : set of 4 metal feet, diameter 60 mm ;


**Shelf** : 1 intermediate grid, steel with polyamide or stainless steel coating, with or without anti-fall edges. Provided with 2 fixing legs. Thermometer location in the crate

## Customization

**Signage** : heat-sealed adhesive – ready-to-print file provided by the client.

**Tracking** : temperature/GPS tracking solution.

**Branding marking** : engraved aluminum plate 150 x 90 mm

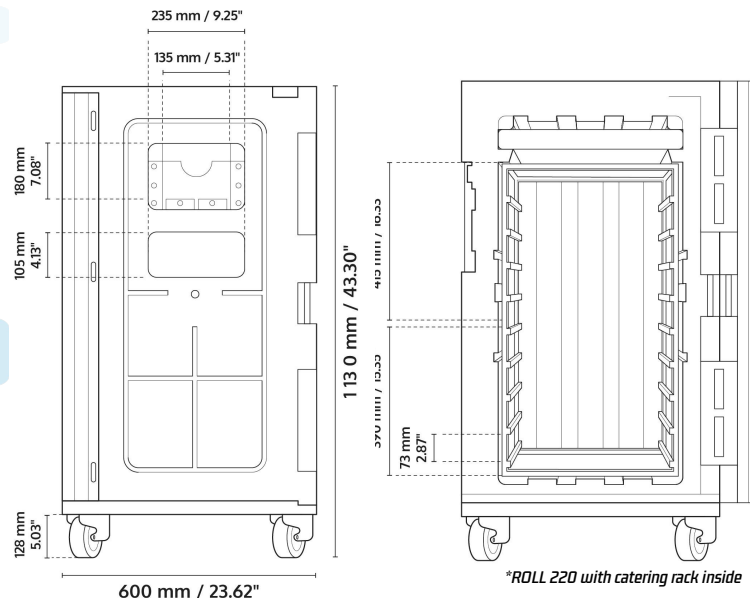

## Insulated container properties

Thermal

Coef K.	0.38 W/m <sup>2</sup> .°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 85 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	480 Kg
Static load capacity	960 Kg
Double-walled, rotational-molded and grooved	

■ Update 26/10/2023